

# TECRYL

## PROFESSIONAL DECORATORS CAULK

✓ Tec7 quality acrylic sealant.

✓ Virtually odourless.

✓ Easy to finish.

✓ Repaintable after 1 hour.

✓ Compatible with all paints and varnishes.

✓ Suitably resistant to damp and condensation.

✓ Safe to use with all construction materials.



## GENERAL INFORMATION

### Product description

Tecryl is a professional acrylic mastic used to seal and fill all construction materials. The formulation ensures a perfect finish with all types of paint, stains and varnishes, with little or no risk of reactions such as blistering or discolouration. Tecryl sets to a plastic consistency which is perfect to take up expansion and movement in the substrate without loosening or cracking.



**Available packages & colors**

SKU	EAN	Description
528100296	5414195007983	Tecryl white - cartridge 310ml


**Application**

- Sealing and finishing of joints, gaps and cracks before overcoating.
- Sealing of joints between frames, walls, window sills, skirtings, etc.
- Repairs and sealing of cracks and joints in aerated concrete, stone, plasterwork and woodwork.
- Sealing of angle and panel joints in interior construction.
- Filling drill and screw holes in walls and ceilings.

# TECHNICAL INFORMATION

## Specifications

- Base: acrylate.
- Odour: low odour.
- Relative density (DIN 53479): 1,65 g/ml.
- Skinning time (at 23°C and 50% relative humidity): 10 minutes.
- Volume change (ISO 10563):  $\leq 15\%$ .
- Ambient application temperature: from +5°C to +40°C.
- Temperature resistance after curing: from +20°C to +80°C.
- Tensile strength (DIN 53504 S2): 0.68 N/mm<sup>2</sup>.
- Elongation at break (DIN 53505): 200%.
- Movement capacity: 12,5%.
- Shore A hardness: 30.
- Modulus at 100% strain (DIN 53504 S2): circa 0.65 N/mm<sup>2</sup>.
- Storage life: 24 months in a dry place. The product may freeze down to -15°C during transport without loss of quality).
- Safety measures: please consult the safety datasheet.

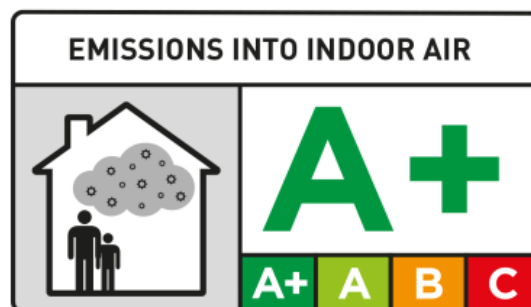

## Certificate

[tecryl-emicodeec1-2024-en.pdf](#)

## DOP

[tecryl-dop-210818-en.pdf](#)

## Safety data sheet

[tecryl-sds-en-240522.pdf](#)

## Technical data sheet

[tecrylnovatechtecv2024-09-13-10-40-47en-ie.pdf](#)

# INSTRUCTIONS

- Apply to clean and dry or slightly damp substrates.
- Strike off dry or wet with a spatula.

Repaintable after 1 hour, depending on temperature and air humidity. Remove any masking tape before the skin forms to prevent damage. Use X-Seal for expansion joints. Improve adhesion and reinforce weak substrates such as aerated concrete or plaster by coating with diluted Tecryl (2 parts water to 1 part Tecryl). Test the adhesion to plastics, powder coatings, exotic timbers, Belgian bluestone and bituminous materials. A perfect joint will be as deep as it is wide (from 5 to 10 mm).

The drying time depends on:

- the temperature of the product;
- the ambient temperature;
- the temperature of the substrate;
- the coat thickness;
- the air humidity;
- the humidity of the substrate.

Not to be used as glazing putty or as an adhesive sealant. Not suitable for submerged joints or in locations with standing water. Use Xealpro to seal wet joints around showers, baths and sanitary areas.